

SIMART 简灵科技



耐高温



极佳的化学抗性



高温下, 高耐磨


130系列
高科技

1

130系列·产品规格

简灵科技工程塑料轴承
High Wear Resistance. Cost Down.

轴套- S型(mm)



倒角f和内径d的关系：

d	Φ1-6	Φ6-12	Φ12-30	Φ>30
f	0.3	0.5	0.8	1.2

注：“当产品壁厚小于1mm时，倒角为20°。
尺寸符合ISO 3547-1标准，且提供定制服务。

订购编号示例 1 产品代码 130SM-0304-06 2 内径d 03 3 外径D 04 4 长度L 06

1 产品代码	2 d	d 公差 压入 H7 孔后	3 D	4 L h13
130SM-0203-03	2	+0.006 +0.046	3.5	3
130SM-0304-03	3		4.5	3
130SM-0304-06	3		4.5	6
130SM-0405-04	4	+0.010 +0.058	5.5	4
130SM-0405-06	4		5.5	6
130SM-0405-09	4		5.5	9
130SM-0405-10	4		5.5	10
130SM-0507-035	5		7	3.5
130SM-0507-05	5		7	5
130SM-0507-08	5		7	8
130SM-0507-10	5		7	10
130SM-0608-06	6		8	6
130SM-0608-08	6		8	8
130SM-0608-10	6		8	10
130SM-0608-13	6		8	13.8
130SM-0709-10	7	+0.013 +0.071	9	10
130SM-0709-12	7		9	12
130SM-0810-06	8		10	6
130SM-0810-08	8		10	8
130SM-0810-10	8		10	10
130SM-0810-12	8		10	12
130SM-0810-15	8		10	15
130SM-1012-035	10		12	3.5
130SM-1012-06	10		12	6
130SM-1012-08	10		12	8
130SM-1012-10	10		12	10
130SM-1012-12	10		12	12
130SM-1012-15	10		12	15
130SM-1012-20	10		12	20
130SM-1214-035	12	+0.016 +0.086	14	3.5
130SM-1214-06	12		14	6
130SM-1214-08	12		14	8
130SM-1214-10	12		14	10
130SM-1214-12	12		14	12
130SM-1214-15	12		14	15
130SM-1214-20	12		14	20
130SM-1214-25	12		14	25
130SM-1315-10	13		15	10
130SM-1315-20	13		15	20
130SM-1416-12	14		16	12
130SM-1416-15	14		16	15

1 产品代码	2 d	d 公差 压入 H7 孔后	3 D	4 L h13
130SM-1416-20	14	+0.016 +0.086	16	20
130SM-1416-25	14		16	25
130SM-1517-07	15		17	07
130SM-1517-10	15		17	10
130SM-1517-15	15		17	15
130SM-1517-20	15		17	20
130SM-1517-25	15		17	25
130SM-1618-10	16		18	10
130SM-1618-12	16		18	12
130SM-1618-15	16		18	15
130SM-1618-20	16		18	20
130SM-1618-25	16		18	25
130SM-1618-35	16		18	35
130SM-1719-20	17	+0.020 +0.104	19	20
130SM-1820-15	18		20	15
130SM-1820-20	18		20	20
130SM-1820-25	18		20	25
130SM-2022-140	20		22	14
130SM-2022-145	20		22	14.5
130SM-2022-17	20		22	17
130SM-2022-18	20		22	18
130SM-2022-20	20		22	20
130SM-2023-07	20		23	7
130SM-2023-10	20		23	10
130SM-2023-15	20		23	15
130SM-2023-20	20		23	20
130SM-2023-25	20		23	25
130SM-2023-30	20		23	30
130SM-2225-15	22	+0.020 +0.104	25	15
130SM-2225-20	22		25	20
130SM-2225-25	22		25	25
130SM-2225-30	22		25	30
130SM-2426-20	24		26	20
130SM-2427-06	24		27	06
130SM-2427-15	24		27	15
130SM-2427-20	24		27	20
130SM-2427-25	24		27	25
130SM-2427-30	24		27	30
130SM-2528-077	25		28	7.7
130SM-2528-09	25		28	9
130SM-2528-12	25		28	12

130系列·产品规格

简灵科技工程塑料轴承
High Wear Resistance. Cost Down.




轴套- S型(mm)

1 产品代码	2 d	d 公差	3 D	4 L	1 产品代码	2 d	d 公差	3 D	4 L
		压入 H7 孔后		h13			压入H7孔后		h13
130SM-2528-13	25	+0.020 +0.104	28	13	130SM-3539-40	35	+0.025 +0.125	39	30
130SM-2528-15	25		28	15	130SM-3539-50	35		39	50
130SM-2528-20	25		28	20	130SM-4044-20	40		44	20
130SM-2528-25	25		28	25	130SM-4044-30	40		44	30
130SM-2528-30	25		28	30	130SM-4044-40	40		44	40
130SM-2528-35	25		28	35	130SM-4044-50	40		44	50
130SM-2628-10	26		28	10	130SM-4550-20	45		50	20
130SM-2730-05	27		30	5.7	130SM-4550-30	45		50	30
130SM-2832-20	28		32	20	130SM-4550-40	45		50	40
130SM-2832-25	28		32	25	130SM-4550-50	45		50	50
130SM-2832-30	28		32	30	130SM-5055-20	50		55	20
130SM-2832-69	28		32	69	130SM-5055-30	50		55	30
130SM-3034-10	30		34	10	130SM-5055-40	50		55	40
130SM-3034-15	30		34	15	130SM-5055-50	50		55	50
130SM-3034-20	30		34	20	130SM-5055-60	50		55	60
130SM-3034-25	30		34	25	130SM-5560-50	55		60	50
130SM-3034-30	30		34	30	130SM-6065-45	60		65	45
130SM-3034-40	30		34	40	130SM-6065-60	60		65	60
130SM-3236-20	32	+0.025 +0.125	36	20	130SM-6570-50	65	+0.030 +0.150	70	50
130SM-3236-25	32		36	25	130SM-7075-70	70		75	70
130SM-3236-30	32		36	30	130SM-7580-60	75		80	60
130SM-3236-35	32		36	35	130SM-8085-100	80		85	100
130SM-3236-40	32		36	40	130SM-9095-100	90		95	100
130SM-3236-54	32		36	54	130SM-100105-100	100		105	100
130SM-3539-20	35		39	20	130SM-110115-100	110		115	100
130SM-3539-30	35		39	30	130SM-120125-100	120		125	100

130系列·产品规格

简灵科技工程塑料轴承
High Wear Resistance. Cost Down.

法兰轴承- F型(mm)

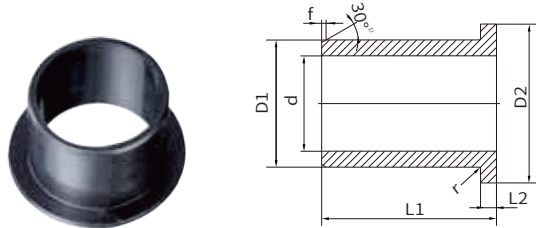

倒角f和内径d的关系：

d	Φ1-6	Φ6-12	Φ12-30	Φ >30
f	0.3	0.5	0.8	1.2

注：”当产品壁厚小于1mm时，倒角为20°。
尺寸符合ISO 3547-1标准，且提供定制服务。

订购编号示例

1 产品代码 130FM-0405-04

2 内径d 04

3 外径D 05

4 长度L1 04


1 产品代码	2 d	d 公差 压入 H7 孔后	3 D1	D2	4 L1	L2
			d13	h13	-0.14	
130FM-020406-03	2	+0.006	4	6	3	1
130FM-0304-05	3	+0.046	4.5	7.5	5	0.75
130FM-0405-04	4	+0.010 +0.058	5.5	9.5	4	0.75
130FM-0405-06	4		5.5	9.5	6	0.75
130FM-040508-06	4		5.5	8	6	0.75
130FM-0507-05	5		7	11	5	1
130FM-0608-04	6		8	12	4	1
130FM-0608-08	6		8	12	8	1
130FM-0608-10	6		8	12	10	1
130FM-081012-04	8	+0.013 +0.071	10	12	4	1
130FM-0810-05	8		10	15	5.5	1
130FM-0810-07	8		10	15	7.5	1
130FM-0810-08	8		10	15	8	1
130FM-0810-09	8		10	15	9.5	1
130FM-081014-31	8		10	14	31.5	1
130FM-0911-18	9		11	15	18	1
130FM-1012-05	10		12	18	5	1
130FM-1012-06	10		12	18	6	1
130FM-1012-07	10		12	18	7	1
130FM-1012-08	10		12	15	8	1
130FM-1012-09	10		12	18	9	1
130FM-1012-12	10		12	18	12	1
130FM-1012-15	10		12	18	15	1
130FM-1012-17	10		12	18	17	1
130FM-1012-18	10		12	18	18	1
130FM-1012-22	10		12	15	22	1
130FM-1012-25	10		12	18	25	1
130FM-121418-039	12	+0.016 +0.086	14	18	3.9	1
130FM-1214-055	12		14	20	5.5	1
130FM-121418-059	12		14	18	5.9	1
130FM-1214-09	12		14	20	9	1
130FM-1214-12	12		14	20	12	1
130FM-1214-15	12		14	20	15	1
130FM-1214-17	12		14	20	17	1
130FM-1416-10	14		16	22	10	1
130FM-1416-12	14		16	22	12	1

1 产品代码	2 d	d 公差 压入 H7 孔后	3 D1	D2	4 L1	L2
			d13	h13	-0.14	
130FM-1416-17	14	+0.016 +0.086	16	22	17	1
130FM-1517-06	15		17	23	6	1
130FM-1517-09	15		17	23	9	1
130FM-1517-12	15		17	23	12	1
130FM-1517-17	15		17	23	17	1
130FM-1618-12	16		18	24	12	1
130FM-1618-17	16	+0.020 +0.104	18	24	17	1
130FM-1820-12	18		20	26	12	1
130FM-1820-17	18		20	26	17	1
130FM-1820-22	18		20	26	22	1
130FM-2023-065	20		23	30	6.5	1.5
130FM-2023-075	20		23	30	7.5	1.5
130FM-2023-11	20		23	30	11.5	1.5
130FM-2023-16	20		23	30	16.5	1.5
130FM-2023-21	20		23	30	21	1.5
130FM-252833-08	25		28	33	8	1
130FM-2528-11	25	+0.025 +0.125	28	35	11.5	1.5
130FM-2528-13	25		28	35	13.5	1.5
130FM-2528-16	25		28	35	16.5	1.5
130FM-2528-21	25		28	35	21	1.5
130FM-2730-20	27		30	38	20	1.5
130FM-3034-16	30		34	42	16	2
130FM-3034-26	30		34	42	26	2
130FM-3034-40	30		34	42	40	2
130FM-3236-15	32		36	45	15	2
130FM-3236-26	32		36	45	26	2
130FM-3539-16	35	+0.030 +0.150	39	47	16	2
130FM-3539-26	35		39	47	26	2
130FM-4044-22	40		44	52	22	2
130FM-4044-30	40		44	52	30	2
130FM-4044-40	40		44	52	40	2
130FM-4550-50	45		50	58	50	2
130FM-5055-40	50		55	63	40	2
130FM-6065-40	60		65	73	40	2
130FM-7075-40	70		75	83	40	2
130FM-7580-50	75		80	88	50	2

130系列·产品规格

简灵科技工程塑料轴承
High Wear Resistance. Cost Down.

止推垫圈- T型(mm)

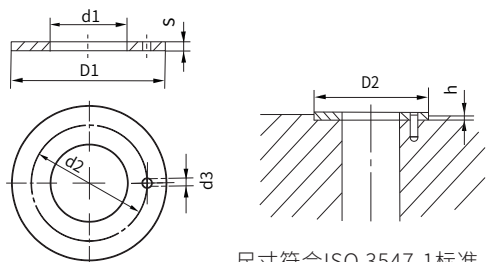

尺寸符合ISO 3547-1标准，且提供定制服务。

订购编号示例 1 产品代码 130TM-0620-015 2 内径d 06 3 外径D 20 4 厚度S 015

1 产品代码	2 d1	3 D1	4 S	d2	d3	h	D2
	+0.25 0	0 -0.25	0 -0.05	+0.12 -0.12	+0.375 +0.125	+0.20 -0.20	+0.12 0
130TM-0620-015	6	20	1.5	13	1.5	1.0	20
130TM-0818-015	8	18	1.5	13	1.5	1.0	18
130TM-0829-015	8	29	1.5	—	—	1.0	29
130TM-0830-015	8	30	1.5	—	—	1.0	30
130TM-1018-010	10	18	1.0	—	—	0.7	18
130TM-1224-015	12	24	1.5	18	1.5	1.0	24
130TM-1426-015	14	26	1.5	20	2.0	1.0	26
130TM-1522-008	15	22	0.8	—	—	0.5	22
130TM-1524-015	15	24	1.5	19.5	1.5	1.0	24
130TM-1630-015	16	30	1.5	22	2.0	1.0	30
130TM-1832-015	18	32	1.5	25	2.0	1.0	32
130TM-2036-015	20	36	1.5	28	3.0	1.0	36
130TM-2238-015	22	38	1.5	30	3.0	1.0	38
130TM-2442-015	24	42	1.5	33	3.0	1.0	42
130TM-2644-015	26	44	1.5	35	3.0	1.0	44
130TM-2848-015	28	48	1.5	38	4.0	1.0	48
130TM-3254-015	32	54	1.5	43	4.0	1.0	54
130TM-3862-015	38	62	1.5	50	4.0	1.0	62
130TM-4266-015	42	66	1.5	54	4.0	1.0	66
130TM-4874-020	48	74	2.0	61	4.0	1.5	74
130TM-5278-020	52	78	2.0	65	4.0	1.5	78
130TM-6290-020	62	90	2.0	76	4.0	1.5	90

— 无固定孔设计

草图

